
Audio Consoles 6 zones



MODEL GT-CPM-2001-6

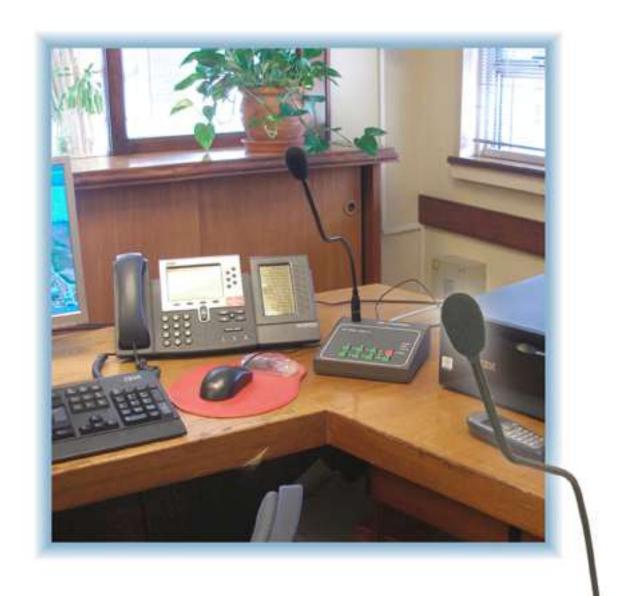

Features

Description:

- Message emission to all system wide or selected zones by simply selecting the zone and pressing the "speak" key.
- Compatibility with previously installed systems.
- Fully integrated into desktop console
- High quality audio to ensure message intelligibility.
- Multiple consoles connection.

Features:

- Zone, multiple zones and general call.
- Activated zone Light indicator
- Call inhibition when the system is busy.
- Pre-message Ding Dong with LED indicator.
- Gooseneck unidirectional microphone with XLR conector.
- Busy/free system indicator

Technical features:

- Individual power supply for each console.
- Normalized audio output 1v-200 ohm.
- Gains control, bass and treble
- DING DONG sound level and time controls.
- Equalized frequency response for maximum intelligibility.
- Built-in audio compressor.
- Installation in parallel.

